

GG-LTE-1101/GG-LTE-1101J

Multi-function Wide-range Voltage Audible-
Visual Warning Beacon



Wide Voltage



High-bright
Multi Color



Adjustable Sound



Adjustable Light

GG-LTE-1101/GG-LTE-1101J

WARNING BEACON



PRODUCT FEATURES

- Light modes adjustable as required (Steady-on/ Flashing/ Rotating-flash).
- Sound modes adjustable as required (Alarm tone/ Intermittent beep/ Continuous beep).
- Multi-voltage version with 4-wire output as standard. Connect to required voltage per product label or wiring diagram for wide application without voltage limitation.
- Colored diffuser lampshade matched with high-brightness color-matched LED beads for excellent visibility.
- Layer-by-layer twist-lock lampshade structure for easy disassembly and assembly.
- Multiple mounting options to meet various application scenarios.
- Standard output wire, factory wire length ≥23cm.


FUNCTION DESCRIPTION

Light Adjustment Switch

- ▲ Rotating-flash
- ▲ Fast flashing
- ▲ Steady-on
- ▲ Slow flashing
- ▲ Left-right flashing

Sound Adjustment Switch

- ▲ Siren
- ▲ Water-truck tone
- ▲ Beep
- ▲ Continuous buzzer

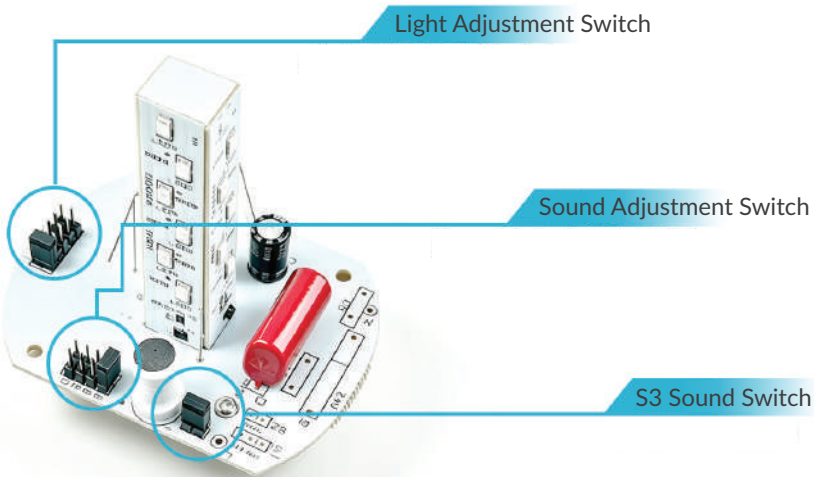

NAMING RULES

GG-LTE-11 - ① - ②

①	Buzzer
/	Buzzer Not Included as Standard
J	Built-in Buzzer

②	Color
R	Red
A	Yellow
G	Green
B	Blue

GG-LTE-1101/ GG-LTE-1101J

WARNING BEACON

KEY SPECIFICATIONS

Technical Parameters	GG-LTE-1101	GG-LTE-1101J
Function	Light: 1. Rotating-flash 2. Steady-on 3. Left-right flashing 4. Fast flashing 5. Slow flashing	Light: 1. Rotating-flash 2. Fast flashing 3. Steady-on 4. Slow flashing 5. Left-right flashing Sound: A. Siren C. Beep B. Water-truck tone D. Continuous buzzer
Flashing Rate	60 times/1 minute	
Buzzer Melody Type		A. Siren C. Beep B. Water-truck tone D. Continuous buzzer
Buzzer Volume		>105dB (30cm/Horizontal direction)
Acoustic Power		0.5W
Diameter	Lamp cover: Flame-retardant PC; Base: ABS engineering plastic	
Material	φ95mm	
Number of Layers	1	
Rated Insulation Voltage	690V	
Rated Voltage Ue	120VAC/DC, 24VAC/DC, 110-240VAC, 380VAC	
Light Output Power	3W	
Withstand Test Voltage	1890V	
Light Source Lifetime	50000 hours	
Light Source	SMD LED	
Ambient Temperature	-25℃ ~ +50℃	
Ambient Humidity	35~85%Rh	

Buzzer-free version

	Voltage	Color	Model No.
	AC/DC12V	Red	GG-LTE-1101-R
	AC/DC24V	Green	GG-LTE-1101-G
	AC220V	Yellow	GG-LTE-1101-Y
	AC380V	Blue	GG-LTE-1101-B

Audible version

	Voltage	Color	Model No.
	AC/DC12V	Red	GG-LTE-1101-J-R
	AC/DC24V	Green	GG-LTE-1101-J-G
	AC220V	Yellow	GG-LTE-1101-J-Y
	AC380V	Blue	GG-LTE-1101-J-B


GG-LTE-1101/GG-LTE-1101J

WARNING BEACON

MOUNTING OPTIONS




Screw Mounting

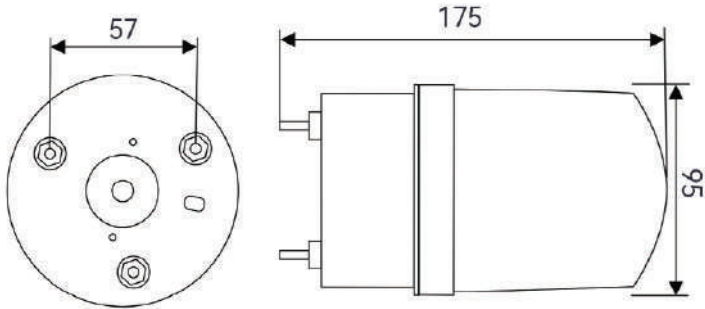


Unit: mm

Wiring diagram

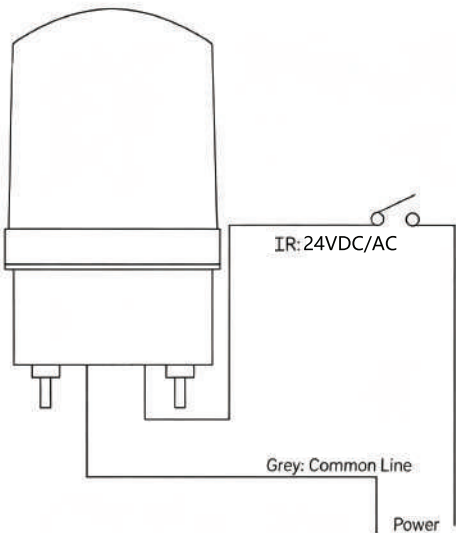

24V

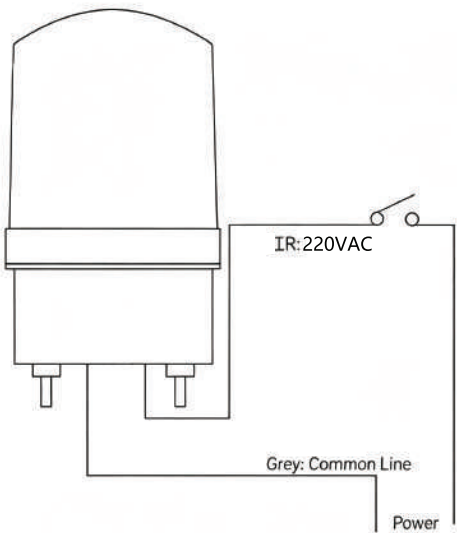

220V